



Industrial Vacuum Furnace Thermocouples - Type 40 & 41



**Ceramic insulated thermocouple sensors
with integral Spectite® vacuum seal.**

**For high temperature service up to 2910°F
in vacuum applications.**

**Wide range of designs and sizes to suit all
styles of vacuum furnace.**

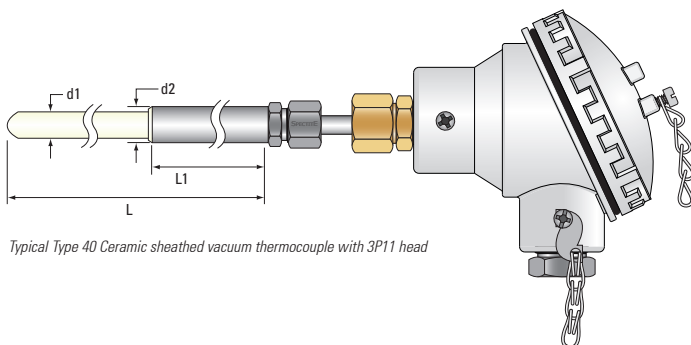
Type 40 & 41 Industrial Vacuum Furnace Thermocouples

Ceramic Sheathed Vacuum Thermocouples

Type 40/41 assemblies incorporate an integral Spectrite® seal and are ideal for vacuum furnace applications. The Spectrite® vacuum seal is rated to 5×10^{-6} torr with low leak rates (better than or equal to 1×10^{-6} scc/sec. under 1 Atm @ 20°C). These sensors can be supplied to all recognized standards and tolerances when combined with our UKAS calibration services (see section 7). They are available as simplex or duplex and a wide range of support tube fittings for attachment into the process is available.

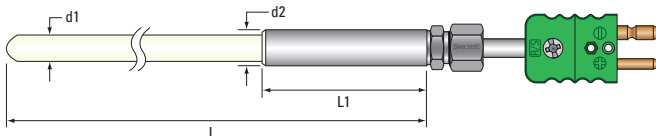
- Vacuum seal rated 5×10^{-6} torr
- Low leak rates
- Integral Spectrite® seal on internal wires maintains vacuum even if sheath is damaged
- Wide operating temperature range up to 2910°F
- Wide range of attachments for process installation
- Simplex and Duplex versions available
- UKAS and In-House calibration options available to all major international and industry specific standards
- Flexible tagging options available for clear traceability
- Support tubes as standard are made from 316 Stainless Steel

Type 40 - Ceramic Sheathed Vacuum Furnace Thermocouple with Insulated Junction



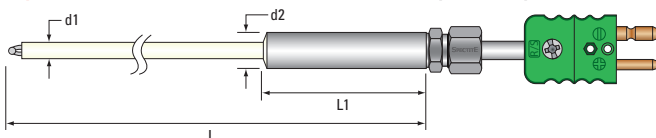
Typical Type 40 Ceramic sheathed vacuum thermocouple with 3P11 head

Type 40 - Ceramic Sheathed Vacuum Furnace Thermocouple with Insulated Junction



Typical Type 40 Ceramic sheathed vacuum thermocouple with standard plug

Type 41 - Ceramic Sheathed Vacuum Furnace Thermocouple with Exposed Junction







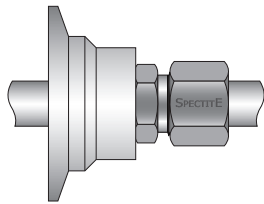
Typical Type 41 Exposed junction ceramic sheathed vacuum thermocouple with standard plug

SECTION 1	Thermocouple Type	Temperature Range	
		(continuous)	(short term)
K	Nickel Chromium vs Nickel Aluminium	32°F to +2010°F	-290°F to +2460°F
N	Nicrosil vs Nisil	32°F to +2010°F	-450°F to +2370°F
R	Platinum - 13% Rhodium vs Platinum	32°F to +2820°F	-60°F to +3180°F
S	Platinum - 10% Rhodium vs Platinum	32°F to +2910°F	-60°F to +3090°F
B	Platinum - 30% Rhodium vs Platinum - 6% Rhodium	+212°F to +2910°F	+212°F to +3310°F

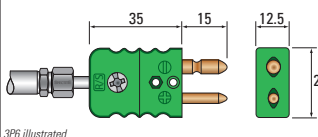
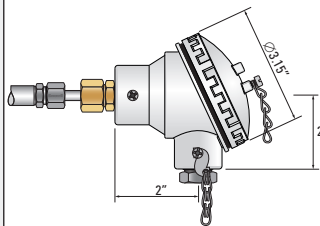
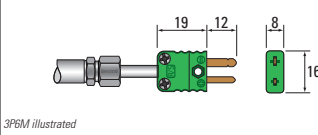
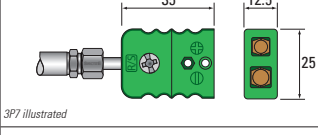
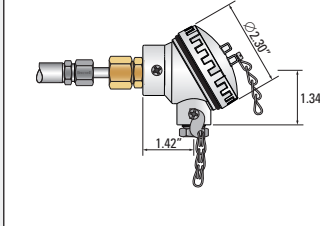
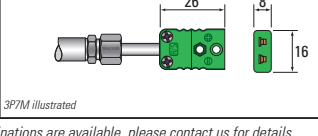
SECTION 2	Sheath Material	Operational Properties	Maximum Temperature
IAP	Impervious Aluminous Porcelain	Ideally suited for use with base metal thermocouples. Has a very low temperature coefficient of expansion thus giving excellent resistance to thermal shock. Offers high strength and high resistance to flux and slag attack. Suited to kiln applications where low contamination requirements preclude the use of a metal sheath. NB. Requires support at high temperature if horizontal.	2550°F
IRA	Impervious Recrystallized Alumina	Ideally suited for use with precious metal thermocouples at high temperatures. Provides a fair resistance to thermal shock. High degree of inertness to chemicals. Ideal for reducing carbonaceous atmospheres and offers a high resistance to alkaline and other fluxes.	2910°F

SECTION 3	Ceramic Sheath Diameter 'd1'	Support Tube Diameter 'd2'	Type No.
Standard Sizes	0.118"	0.236"	41 (simplex only)
	0.138"	0.236"	41 (duplex only)
	0.157"	0.236"	40 or 41
	0.236"	0.393"	40 or 41
	0.315"	0.472"	40
	0.393"	0.626"	40
	0.472"	0.626"	40

SECTION 4	Types of Sensing Junction	
2I		Insulated (Type 40) Hot junction insulated from sheath (or 2ID if Duplex element is required).
2X		Exposed (Type 41) Fastest response, mainly for the measurement of air temperature in ducts (or 2XD if Duplex element is required).

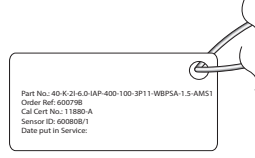
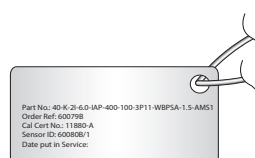

SECTION 5	Support Tube Mounting Fittings			
	Description	Material	Thread	Sketch
PF	Vacuum Feedthrough with Viton sealant as standard	Stainless Steel	1/4" NPT 1/2" NPT or 3/4" NPT	
WBTSF	Welded Fixed Position Screwed Bushes	Stainless Steel	3/4" NPT	
WBTSK			1" NPT	
KFW	KFW - Welded KF vacuum flange	Stainless Steel	N/A	
CFW	CFW - Welded CF (ConFlat) vacuum flange	Stainless Steel	N/A	

Industrial Vacuum Furnace Thermocouples Type 40 & 41

SECTION 6	Types of End Seal Configuration			
	Diagram	Specification	Diagram	Specification
	 <p>3P6 illustrated</p>	Standard 2-pin (round) Plug 3P6 Plug rated to 410°F 3P6H Plug rated to 570°F 3P6UH Plug rated to 790°F 3P6E Plug rated to 1110°F		Weatherproof die cast alloy, epoxy coated, screw top terminal head with the tube entry and wire entry at a right angle to each other, with a ceramic terminal block. Suitable for simplex and duplex assemblies. Supplied with a 20mm x 1.5mm ISO metal pinch gland on the wire entry for wires from 0.236" to 0.551" diameter.
	 <p>3P6M illustrated</p>	Miniature 2-pin (flat) Plug 3P6M Plug rated to 410°F 3P6MH Plug rated to 570°F 3P6MUH Plug rated to 790°F 3P6ME Plug rated to 1110°F		
	 <p>3P7 illustrated</p>	Standard 2-pin (round) Socket 3P7 Socket rated to 410°F 3P7H Socket rated to 570°F 3P7UH Socket rated to 790°F 3P7E Socket rated to 1110°F		Weatherproof die cast alloy, epoxy coated, screw top terminal head with the tube entry and cable entry at a right angle to each other. Supplied with a ceramic terminal block. Suitable for simplex and duplex assemblies. Supplied with a 16mm x 1.5mm ISO metal pinch gland on the wire entry for wires from 0.118" to 0.315" diameter.
	 <p>3P7M illustrated</p>	Miniature 2-pin (flat) Socket 3P7M Socket rated to 410°F 3P7MH Socket rated to 570°F 3P7MUH Socket rated to 790°F 3P7ME Socket rated to 1110°F		

Other terminations are available, please contact us for details.

SECTION 7	Calibration Accuracies		
	Standard	Accuracy Supplied	Certification
	IEC1 IEC 60584.1 Class 1	Types K/N: $\pm 1.5^{\circ}\text{C}$ (-40 to $+375^{\circ}\text{C}$) or 0.4% (375 to 1000°C) Types R/S: $\pm 1.0^{\circ}\text{C}$ (0 to 1100°C) or $1^{\circ}\text{C} + 0.3\%$ of temperature above 1100°C (1100 to 1600°C)	TC Ltd offer both UKAS and In-House (traceable to national standards) calibrations to all major international standards up to 1590°C . Our laboratory is fully accredited to ISO17025 and our reports are designed with the requested standard in mind. Our sales engineers are on hand to discuss any requirements so please do not hesitate to contact us for more details.
	AMS1 AMS2750	Types K/N: $\pm 1.1^{\circ}\text{C}$ or 0.4% Type R/S: $\pm 1.0^{\circ}\text{C}$ or 0.25% Type B: $\pm 1.0^{\circ}\text{C}$ or 0.50% (whichever is greater)	
	BAC2 BAC5621	$\pm 1.1^{\circ}\text{C}$ $< 538^{\circ}\text{C}$ or 0.4% of reading $> 538^{\circ}\text{C}$	

SECTION 8	Optional Tagging	
	PL	 <p>Part No.: 40-K-2I-6-D-IAP-400-100-3P11-WBPSA-1.5-AMS1 Order Ref.: 600798 Cal Cert No.: 11880-A Sensor ID: 600808/1 Date put in Service:</p> <p>Plastic ID Label Rated 70°C. Suitable for all end seals.</p>
	ML	 <p>Part No.: 40-K-2I-6-D-IAP-400-100-3P11-WBPSA-1.5-AMS1 Order Ref.: 600798 Cal Cert No.: 11880-A Sensor ID: 600808/1 Date put in Service:</p> <p>Laser Etched Metal Tag Rated 250°C. Suitable for all end seals.</p>
	EL	 <p>Laser Etching on Sensor Laser etch of serial number. This can be instead of or in addition to either of the options above and positioned on the support tube, vacuum fitting or connector as required.</p>

Order Code - Example

Style No.	Thermocouple Type (see section 1)	No. of Elements (see section 4)	Sheath Diameter (d1) (see section 3)	Sheath Material (see section 2)	Sensor Length (L) (in inches)	Support Tube Length (L1) (in mm, if required)	End Seal Termination (see section 6)	Sheath Fitting* (if required, see section 5)	Calibration Accuracy (see section 7)
40	- K	- 2I	- 0.236"	- IAP	- 6	- 100	- 3P11	- WBPSA	- AMS1

* If fixed, specify sheath length under hex (parallel thread) or under thread start (tapered thread) or under flange (welded flange).

Calibration Details (Optional)		
UKAS (U) / In House (I)	Calibration Range (see section 1)	Interval / Custom Temperatures (in °C)
U	- 500/1300	- 100

Tagging Options		
Plastic ID Label (see section 8)	or Metal Tag Label (see section 8)	Etched on Sensor (see section 8)
PL	or ML	- EL

Type 40S Industrial SAT Vacuum Furnace Thermocouples

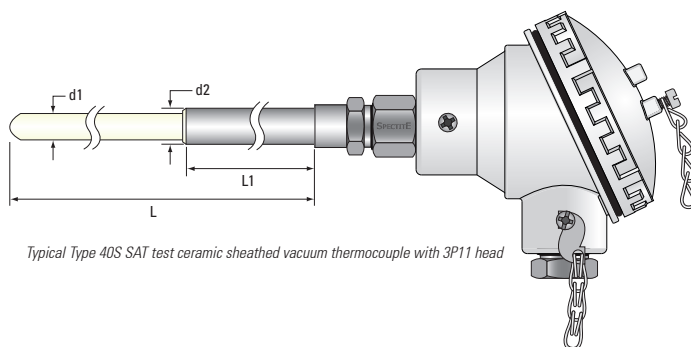
SAT Ceramic Sheathed Vacuum Thermocouples

Type 40S assemblies incorporate an integral Spectrite® seal and are ideal for vacuum furnace applications. The Spectrite® vacuum seal is rated to 5×10^{-6} torr with low leak rates (better than or equal to 1×10^{-6} scc/sec. under 1 Atm @ 20°C). These sensors can be supplied to all recognized standards and tolerances when combined with our UKAS calibration services (see section 8). They are available as simplex or duplex and include a test sensor hole for calibration / survey work. A wide range of support tube fittings for attachment into the process is available.

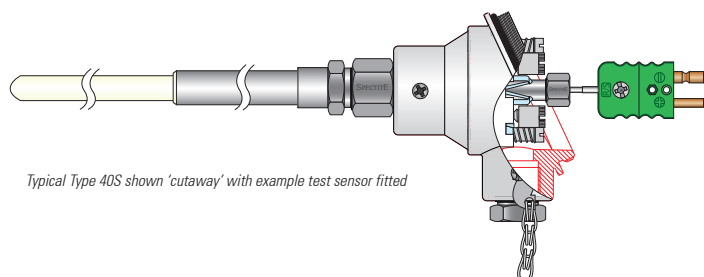
- Vacuum seal rated 5×10^{-6} torr
- Low leak rates
- Integral Spectrite® seal on internal wires maintains vacuum even if sheath is damaged
- Wide operating temperature range up to 2910°F
- Wide range of attachments for process installation
- Test sensor hole for calibration or system accuracy tests (SAT) without removal from process*
- Simplex and Duplex versions available
- UKAS and In-House calibration options available to all major international and industry specific standards
- Flexible tagging options available for clear traceability
- Support tubes as standard are made from 316 Stainless Steel

* Available with terminal head end seals only, see section 7 for details

Type 40S - SAT Test Ceramic Sheathed Vacuum Furnace Thermocouple with Insulated Junction



Typical Type 40S SAT test ceramic sheathed vacuum thermocouple with 3P11 head






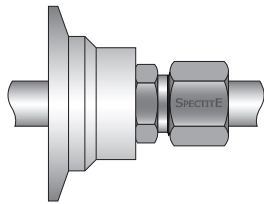
Typical Type 40S shown 'cutaway' with example test sensor fitted

SECTION 1	Thermocouple Type	Temperature Range	
		(continuous)	(short term)
K	Nickel Chromium vs Nickel Aluminium	32°F to +2010°F	-290°F to +2460°F
N	Nicrosil vs Nisil	32°F to +2010°F	-450°F to +2370°F
R	Platinum - 13% Rhodium vs Platinum	32°F to +2820°F	-60°F to +3180°F
S	Platinum - 10% Rhodium vs Platinum	32°F to +2910°F	-60°F to +3090°F
B	Platinum - 30% Rhodium vs Platinum - 6% Rhodium	+212°F to +2910°F	+212°F to +3310°F

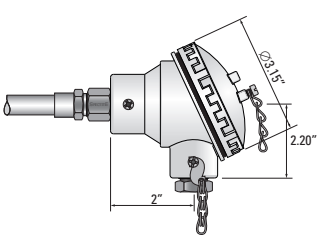
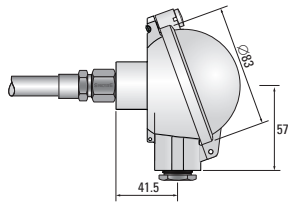
SECTION 2	Sheath Material	Operational Properties	Maximum Temperature
IAP	Impervious Aluminous Porcelain	Ideally suited for use with base metal thermocouples. Has a very low temperature coefficient of expansion thus giving excellent resistance to thermal shock. Offers high strength and high resistance to flux and slag attack. Suited to kiln applications where low contamination requirements preclude the use of a metal sheath. NB. Requires support at high temperature if horizontal.	2550°F
IRA	Impervious Recrystallized Alumina	Ideally suited for use with precious metal thermocouples at high temperatures. Provides a fair resistance to thermal shock. High degree of inertness to chemicals. Ideal for reducing carbonaceous atmospheres and offers a high resistance to alkaline and other fluxes.	2910°F

SECTION 3	Ceramic Sheath Diameter 'd1'	Support Tube Diameter 'd2'	Type No.
Standard Sizes	0.472"	0.626"	40S
	0.670"	1.051"	40S
	0.787"	1.051"	40S


SECTION 4	Types of Sensing Junction	
2I		Insulated (Type 40) Hot junction insulated from sheath (or 2ID if Duplex element is required).

SECTION 5	Support Tube Mounting Fittings			
	Description	Material	Thread	Sketch
PF	Vacuum Feedthrough with Viton sealant as standard	Stainless Steel	1/4" NPT 1/2" NPT or 3/4" NPT	
WBTSF	Welded Fixed Position Screwed Bushes	Stainless Steel	3/4" NPT	
WBTSK			1" NPT	
KFW	KFW - Welded KF vacuum flange	Stainless Steel	N/A	
CFW	CFW - Welded CF (ConFlat) vacuum flange	Stainless Steel	N/A	


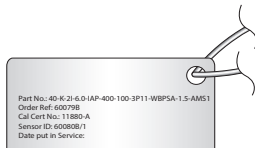
Industrial SAT Vacuum Furnace Thermocouples **Type 40S**

SECTION 6	Types of End Seal Configuration				
	Diagram	Specification		Diagram	Specification
3P11		Standard Die Cast Alloy Head Weatherproof die cast alloy, epoxy coated, screw top terminal head with the tube entry and cable entry at a right angle to each other, with a ceramic terminal block. Suitable for simplex and duplex assemblies. Supplied with a 20mm x 1.5mm ISO metal pinch gland on the cable entry for wires from 0.236" to 0.551" diameter.	3P13A		Die Cast Alloy Head with Flip Top Lid DIN Form A weatherproof die cast alloy, epoxy coated, flip top terminal head with the tube entry and cable entry at a right angle to each other, with a ceramic terminal block. Suitable for simplex, and duplex assemblies. Supplied with a PG16 metal pinch gland on the cable entry for wires from 0.236" to 0.551" diameter.

Other terminations are available, please contact us for details.

SECTION 7	Test Sensor Hole	
	Sketch	Description
		Hole supplied for test sensors with a diameter of 0.059" or 0.079". Other diameters are available on request, please contact us for more details.

SECTION 8	Calibration Accuracies		
	Standard	Accuracy Supplied	Certification
IEC1	IEC 60584.1 Class 1	Types K/N: +/-1.5°C (-40 to +375°C) or 0.4% (375 to 1000°C)	TC Ltd offer both UKAS and In-House (traceable to national standards) calibrations to all major international standards up to 1590°C. Our laboratory is fully accredited to ISO17025 and our reports are designed with the requested standard in mind. Our sales engineers are on hand to discuss any requirements so please do not hesitate to contact us for more details.
		Types R/S: +/-1.0°C (0 to 1100°C) or 1°C + 0.3% of temperature above 1100°C (1100 to 1600°C)	
		Types K/N: ±1.1°C or 0.4% Type R/S: +/-1.0°C or 0.25% Type B: +/-1.0°C or 0.50% (whichever is greater)	
AMS1	AMS2750		
BAC2	BAC5621	±1.1°C <538°C or 0.4% of reading >538°C	

SECTION 9	Optional Tagging	
	PL	ML
	Plastic ID Label Rated 150°F. Suitable for all end seals.	

Order Code - Example										
Style No.	Thermocouple Type (see section 1)	No. of Elements (see section 4)	Sheath Diameter (d1) (see section 3)	Sheath Material (see section 2)	Sensor Length (L) (in mm)	Support Tube Length (L1) (in inches, if required)	End Seal Termination (see section 6)	Sheath Fitting* (if required, see section 5)	Test Sensor Hole (see section 7, specify diameter of 0.059" or 0.079")	Calibration Accuracy (see section 8)
40S	K	2I	0.472"	IAP	6	6	3P11	WBPSA	0.059"	AMS1

* If fixed, specify sheath length under hex (parallel thread) or under thread start (tapered thread) or under flange (welded flange)

Calibration Details (Optional)		
UKAS (U) / In House (I)	Calibration Range (see section 1)	Interval / Custom Temperatures (in °C)
U	500/1300	100

Tagging Options		
Plastic ID Label (see section 9)	Metal Tag Label (see section 9)	Etched on Sensor (see section 9)
PL	or ML	- EL



TC Measurement and Control Inc

PO Box 685

Hillside , IL 60162

Tel: 708-449-0700

Toll Free: 877 244 1777

Fax: 708-449-0777

Email: info@tc-inc.com

Web: www.tc-inc.com

© 2019 TC Measurement and Control Inc
Issue Number: 0823

TC Ltd for Temperature Sensing, Measurement and Control